The new degree of comfort.™

Professional Prestige[™] Hybrid Heat Pump is our most advanced, energy-efficient electric water heater – its 2.45 Energy Factor lowers energy costs

Efficiency

- High 2.45 EF reduces operating cost \$329 annually compared to a standard 50-gallon electric model
- ENERGY STAR® rated

Performance

- 8700 Btu/h compressor: the most powerful in its class more heat can be created by the heat pump and less by the costly electric elements. This translates into significant fuel saving in real life applications. For still more savings, the Rheem hybrid has a wider temperature operating range, which means the heat pump can be used to heat water more days throughout the year.
- Ambient operating range: 37-120° F is widest in class, offering more days of HP operation annually; designed to meet Northern Climate Spec (Tier 1)

Operation Modes

- Energy Saver
- Heat Pump Only
- High Demand
- Electric Heat Only
- Vacation: 2-28 days (or placed on hold indefinitely)

120°

Full-Color LCD Display

 Intuitive, back lit touch screen with diagnostics

Easy Installation

- Easy access side connections
- Narrow 21" diameter, fits through access doors
- Easily replaces a standard electric water heater

Plus...


- EcoNet[™] compatible for future integration with home automation, energy management and demand response systems
- Patented magnesium anode rod with resistor extends the life of the tank
- 3/4" NPT water inlet, outlet and condensate drain connections
- Incoloy stainless steel resistor elements
- Dry-fire protection
- Easy access, top mounted washable air filter
- 2-1/2" Non-CFC foam insulation
- Enhanced flow brass drain valve
- Temperature and pressure relief valve included
- Low lead compliant

Warranty

 12-Year limited tank and parts warranty*

*See Residential Warranty Certificate for complete information

Units meet or exceed ANSI requirements and have been tested according to D.O.E. procedures. Units meet or exceed the energy efficiency requirements of NAECA, ASHRAE standard 90, ICC Code and all state energy efficiency performance criteria.



8" Top clearance for air circulation 3/4" water connections 208-230 Volt – 1 PH Max amp draw – 24 amps





Professional Prestige Hybrid Heat Pump

50-Gallon Capacity 208-230 Volt / 1 PH / 24 Amps Electric









LEED Points = 3


myrheem.com/proclub

		DESCRIPTION	FEATURES			ROUGHING IN DIMENSIONS (SHOWN IN INCHES)				ENERGY INFO.
		MODEL NUMBER	COMPRESSOR BTU/H	FIRST HOUR RATING G.P.H.	RECOVERY IN G.P.H. 90° F RISE	HEIGHT A	DIAMETER B	UNIT WT. (LBS)	APPROX. SHIP WT. (LBS)	ENERGY SAVER
Tall	50	HB50RH	8700	57	21	75-1/2	21	180	226	2.45 EF

Energy Factor based on D.O.E. (Department of Energy) test procedures.



Full-Color LCD Display Screens

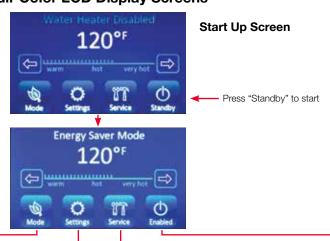

Modes 2-5



HP Only Mode: Provides highest energy efficiency when hot water demands are low



High Demand Mode: Right selection for very high demand (simultaneous operation of multiple hot water fixtures)



Electric Heat Mode: Operates like a standard electric water heater; no heat pump



Vacation Mode: Can be set from 2 to 28 days (82°) or placed on "hold" indefinitely

Settings



Energy Saver Mode 1
Best energy efficiency for typical

Home Screen
Factory set to default to the
"Energy Saver" mode screen

- Select scale: Fahrenheit or Celsius
- Lock or unlock the home screen; Setting screen remains unlocked
- Enable/disable beeping alarm

Service



Current status of HB50 hybrid water heater



run a test

Shows temperatures in tank, ambient air, suction, evaporator

and discharge




Enabled



Press to toggle between Enabled & Standby

- · Enabled: heats water
- Standby: doesn't heat water Note: "Modes" can't be selected when unit is in "Standby"



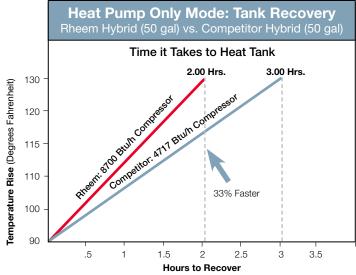

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.

Rheem Water Heating • 101 Bell Road Montgomery, Alabama 36117-4305 • 1.800.621.5622 Rheem Canada Ltd./Ltée • 125 Edgeware Road, Unit 1 Brampton, Ontario L6Y 0P5 • 1.800.268.6966

